

SOT-23 Plastic-Encapsulate Voltage Regulators

78L24 Three-terminal positive voltage regulator

FEATURES

- Maximum Output current I_O : 0.1 A
- Output voltage V_O : 24 V
- Continuous total dissipation P_D : 0.35 W ($T_a=25^\circ\text{C}$)

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	40	V
Operating Junction Temperature Range	T_{OPR}	0-150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65-150	$^\circ\text{C}$




ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=32\text{V}, I_o=40\text{mA}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	V_o	25°C	23.0	24.0	25.0	V	
		0-125 $^\circ\text{C}$	$26.5\text{V} \leq V_i \leq 39\text{V}, I_o=1\text{mA} \sim 40\text{mA}$	22.8	24.0	25.2	V
			$I_o=1\text{mA} \sim 70\text{mA}$	22.8	24.0	25.2	V
Load Regulation	ΔV_o	$I_o=1\text{mA} \sim 100\text{mA}$	25°C	41	240	mV	
		$I_o=1\text{mA} \sim 40\text{mA}$	25°C	28	120	mV	
Line regulation	ΔV_o	$26.5\text{V} \leq V_i \leq 39\text{V}$	25°C	95	480	mV	
		$29\text{V} \leq V_i \leq 39\text{V}$	25°C	78	400	mV	
Quiescent Current	I_q	25°C		4.8	6.5	mA	
Quiescent Current Change	ΔI_q	$28\text{V} \leq V_i \leq 39\text{V}$	0-125 $^\circ\text{C}$		1.5	mA	
		$1\text{mA} \leq I_o \leq 40\text{mA}$	0-125 $^\circ\text{C}$		0.1	mA	
Output Noise Voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$	25°C	97		μV	
Ripple Rejection	RR	$27.5\text{V} \leq V_i \leq 37.5\text{V}, f=120\text{Hz}$	0-125 $^\circ\text{C}$	30	33	dB	
Dropout Voltage	V_d	25°C		1.7		V	







* Pulse test.

TYPICAL APPLICATION

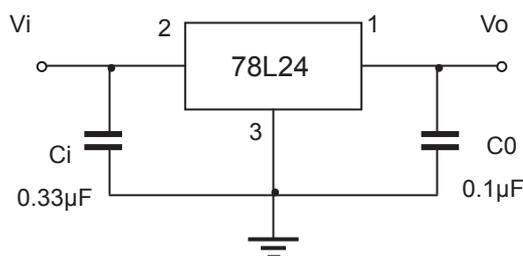

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.



Typical Characteristics

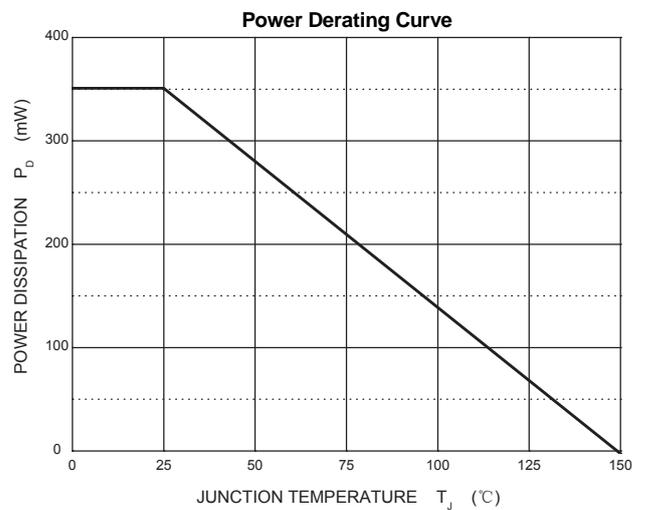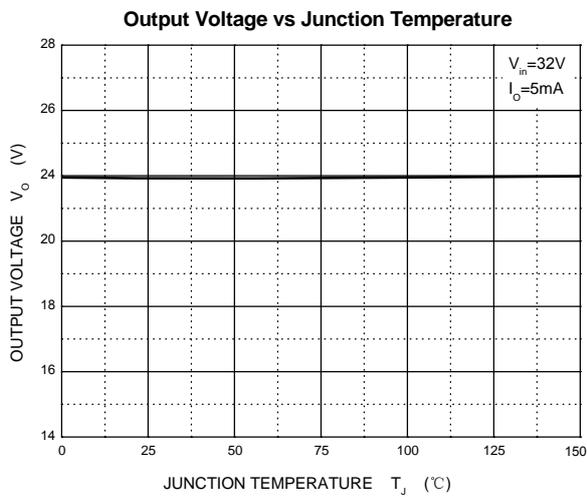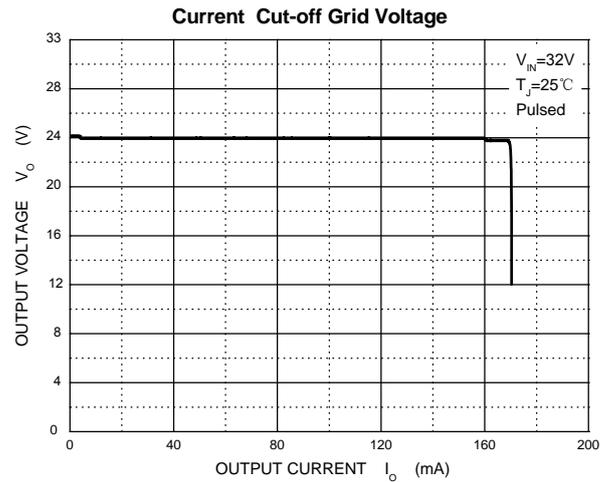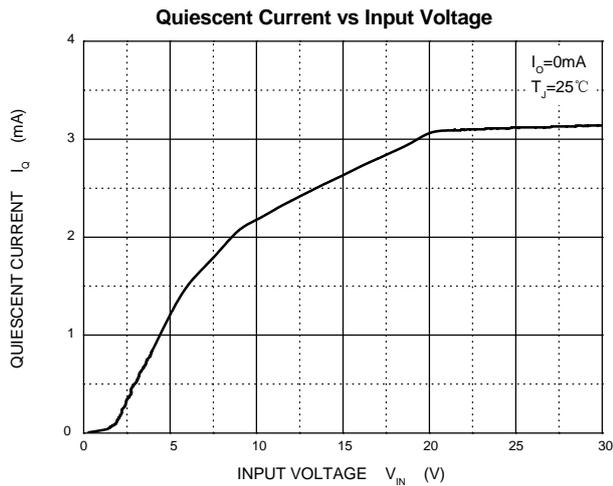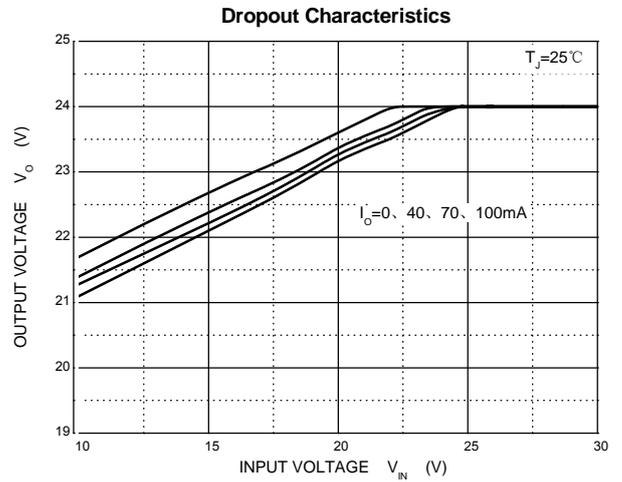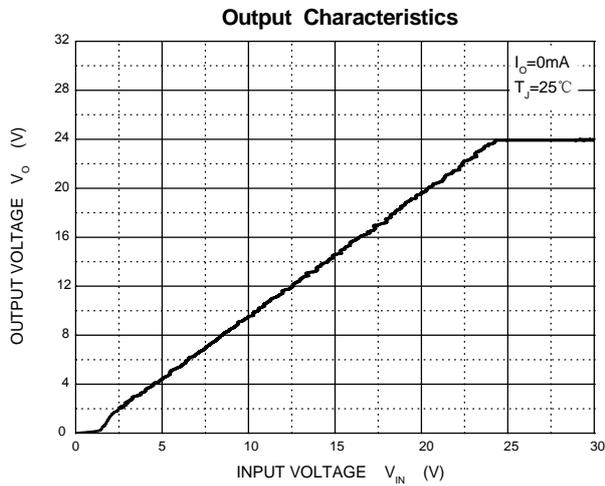

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

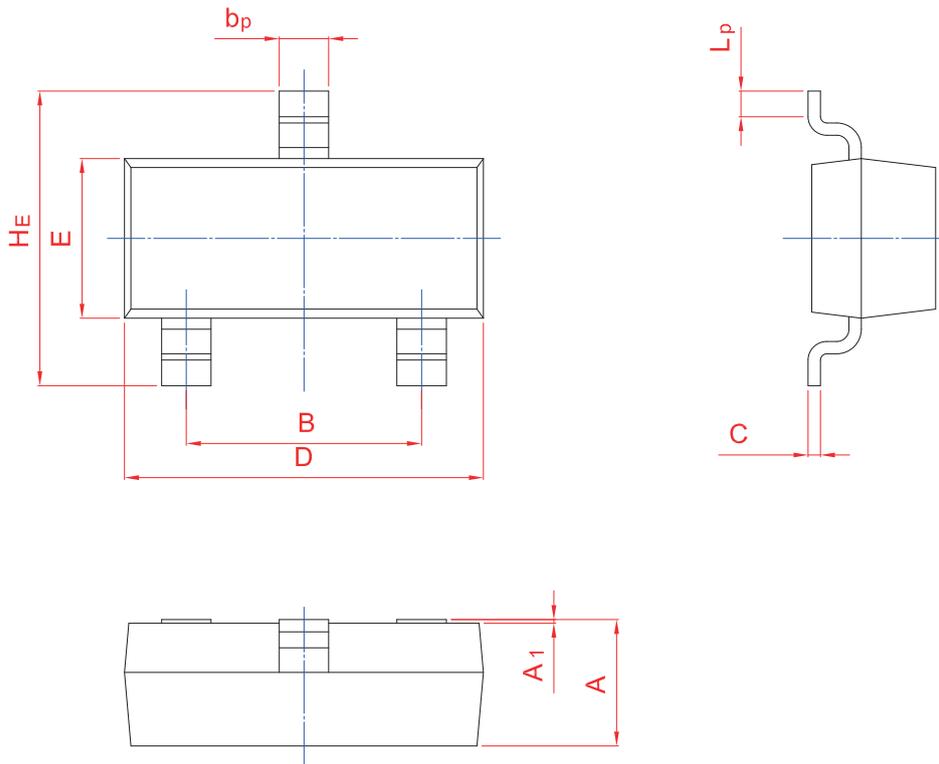

UNIT	A	B	b _p	C	D	E	H _E	A ₁	L _p
mm	1.40	2.04	0.50	0.19	3.10	1.65	3.00	0.100	0.50
	0.95	1.78	0.35	0.08	2.70	1.20	2.20	0.013	0.20